

HUSSMANN®

HTC/TD-138

Countertop Merchandiser



Countertop Merchandiser

HUSSMANN®

Medium Temp Display for Impulse Sales Close to Checkout

Standard Features

- Top Sliding Glass Lids
- Large Front Display Window
- 2 Step Display Racks
- Stainless Steel Exterior
- Stainless Steel Interior
- Thermometer
- Adjustable Temperature Control
- Cold Wall Refrigeration
- Internal Drain to LH Rear Exterior
- Power Cord Connected
- Vents Front, Side and Rear

Warranty

Five years against failure of compressor.
One year against defective material and workmanship, includes labor.



Model HTC/TD-138 shown with two step racks provided as standard.




NEMA 5-15P




3128193
Conforms to UL Std. 471
Certified to CSA C22.2 No 120
Conforms to NSF/ANSI 7

HTC/TD-138 Plan View

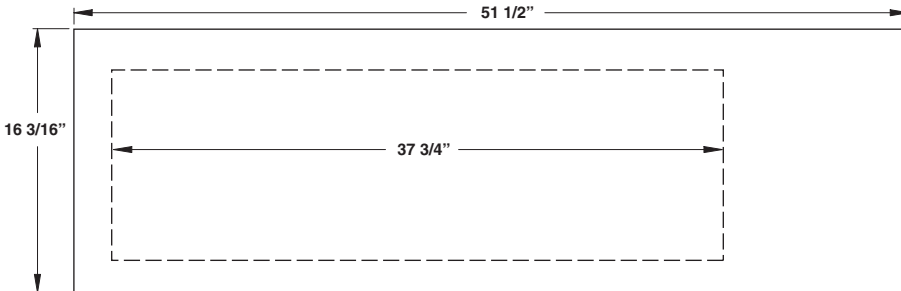

HTC/TD-138 Cross Section

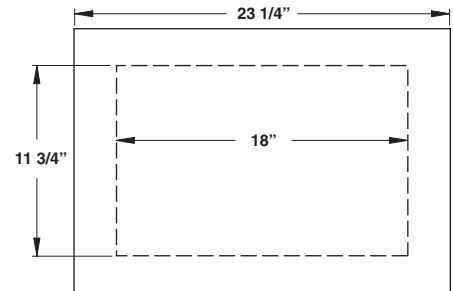

Model	Length	External Depth	Height	Internal Length	Internal Depth	Internal Height	Compressor Length	Compressor Depth	Compressor Exterior Height	Front Glass Height	Front Glass Length	Plug
HTC/TD-138	51 1/2"	23 1/4"	16 3/16"	37 3/4"	18"	11 3/4"	8 5/8"	23 1/4"	16 3/16"	9 1/4"	36 3/4"	NEMA 5-15P

Voltage	Cu. Ft. Capacity	R-134a Refrigerant	Fuse Amps	Run Amps	Ship Weight	Temperature Range	Step Racks (2 Provided as Standard)			
							Length Ea.	Height Ea.	Depth Ea.	Steps (2)
115/60/1	4.87	3.35 oz.	15	1.76	176 lbs.	32°F Min. - 50°F Max.	18 1/2"	7 1/2"	15"	6"-deep x 2 1/2"-high

Note: For optimum performance, this model is designed for use in air conditioned stores where temperature and humidity are maintained at 75°F and 55% R.H. Locate case away from direct sunlight, rapid air currents and extreme temperature changes.

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or shipped.

Web Site: www.hussmann.com
1-800-922-1919

